




MIF NC 1875 L Natural gas genset 1500 kW Continues Power

MIF PLUS INTERNATIONAL
DANISMANLIK HIZMETLERI A.S.
KAVAKLI MAH. YEŞİLYURT CAD. NO:15/2,
IC KAPI NO: 11, BEYLİKDÜZÜ / ISTANBUL

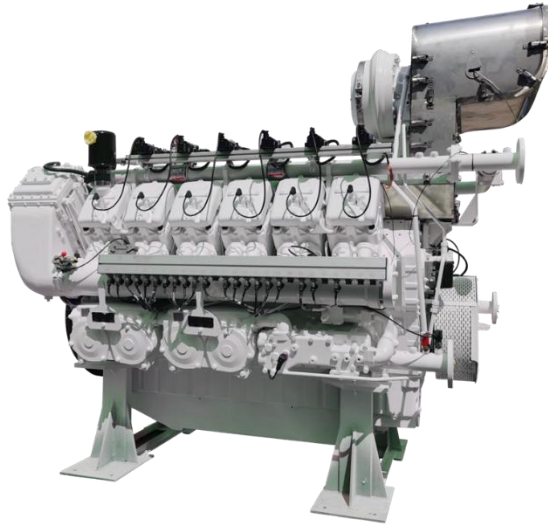

Group		Continuous output
Power	kVA	1875
Power	kW	1500
Engine Speed	rpm	1500
Standard Voltage	kV	10,5
Power Factor	Cos Q	0,8
Gas consumption at 100% power (Hu = 35.88MJ/m3)	Nm3/h	395,2

CONTINUOUS POWER RATING (COP): COP is the power that the engine can continue to use under the prescribed speed and the specified environment condition in the normal maintenance period stipulated in the manufacturing plant. Continuous Power is applicable for supplying utility power at a constant 100% load for an unlimited number of hours per year. No overload capability is available for this rating.

1. GENERALLY

The main equipment of this project is a HND CHG622V16container gas generator set, the rated power of the single generator set is 1500 kW, the continuous output power is 1500 kW, and the output voltage is 10,5 kV. The power station can be operated in the grid-connected mode or the parallel island operation between the HND generator sets, and the cooling method is closed radiator.

2. STANDARD BENCHMARK CONDITIONS

When the environmental conditions do not meet the below items, the power should be corrected according to the manufactory standard.

Atmospheric pressure	100 kPa
Relative humidity	30% — 80%
Ambient air humidity	25°C



MIF NC 1875 L Natural gas genset 1500 kW Continues Power

MIF PLUS INTERNATIONAL
DANISMANLIK HIZMETLERI A.S.
KAVAKLI MAH. YEŞİLYURT CAD. NO:15/2,
IC KAPI NO: 11, BEYLİKDÜZÜ / ISTANBUL

4.1 Gas generator sets

HND CHG622V16 gas engine with Leroy-Somer LSA53.2 VL6 alternator to form a unit.

GENERATOR BASIC PARAMETERS TABLE

Gas generator type	MIF NC 1875 L
Gas engine type	CHG622V16
Primary rated power (kW)	1000
Current (A)	2706
Voltage(V)	10500
Rated speed (r/min)	1500
Power factor Cosφ	0.8
Rated frequency (Hz)	50
Voltage regulation method	Automatically adjust
Speed regulation method	Electronic governor
Excitation	Brush less excitation
Cooling system	Horizontal radiator
The ways of generator outgoing lines	Three-phase and four-wire system
The environment temperature	40°C
Operation mode	Isolated operation or parallel operation
Working hours for per year	7200 hours
Generator set technology type	Four-stroke, water-cooled, turbocharger inter-cooling, air-fuel ratio control, spark plug ignition, electronic control, air and CH4 are mixed externally
First major overhaul	64000 hours
Container generator L*W*H (mm)/=Weight (kg) (Silencers and radiators are not included)	Please refer to the drawing
Design life of generator set	≥20 years



MIF NC 1875 L Natural gas genset 1500 kW Continues Power

MIF PLUS INTERNATIONAL
DANISMANLIK HIZMETLERİ A.S.
KAVAKLI MAH. YEŞİLYURT CAD. NO:15/2,
İC KAPI NO: 11, BEYLİKDÜZÜ / İSTANBUL

ENGINE HEAT PARAMETER

		50%	75%	100%
Power output	kW	750	1125	1500
Gas flow (Hu = 35.88MJ/m3)	Nm3/h	233,4	330,6	395,2
Total energy	kW	2210	3131	3939
Air flow	Nm3/h	3566	5051	5662
Air flow	kg/h	4600	6516	7303
Flue gas flow	Nm3/h	3799	5064	6057
Flue gas flow	kg/h	4775	6364	7600
Exhaust energy at 120°C	kW	400	622	861
Jacket water energy	kW	626	793	960
Jacket water flow	m3/h	75	75	75

4.2 Engine Control System

The gas control system of HND gas engine uses the products of "HEINZMANN GmbH", which is one of the best combustion management control systems in the world today. The air-fuel ratio control system, speed control system, ignition system and knock control system all use the HEINZMANN system imported from the Germany.

➤ Air-fuel ratio control system (Lean Combustion):

Adopt lean combustion technology and accurate electronic control parameters such as ignition timing and air-fuel ratio to adapt more widely type range of gas. Ensure to get more power with lower gas consumption.

- ① Digital microprocessor control technology should be able to automatically and accurately control engine power, air-fuel ratio, ignition timing, and reduce NOx emissions while maintaining appropriate gas consumption.
- ② The air-fuel ratio control system can keep NOx emissions within a smaller fluctuation range under all environmental and operating conditions. The engine requires almost no need adjust when the ambient temperature and air humidity changed.
- ③ Through automatically adjusting the ignition timing, ensuring gas engine running with the best performance, and restraining NOx bring into existence.

4.3 Alternator

The LSA53.2 VL6 alternator of Nidec Leroy-Somer was used. Nidec Leroy-Somer is a world leader in electromechanical and electronic drive systems and the world leader in industrial alternators. Founded in 1919, Leroy-Somer is a French company employing 6200 people in 28 production units and 470 points of sale and service worldwide.



MIF NC 1875 L Natural gas genset 1500 kW Continues Power

MIF PLUS INTERNATIONAL
DANISMANLIK HIZMETLERI A.S.
KAVAKLI MAH. YEŞİLYURT CAD. NO:15/2,
IC KAPI NO: 11, BEYLİKÜZÜ / ISTANBUL

ALTERNATOR PERFORMANCE

Item	Mes. Unit	Parameter
Rated Power	kVA	2200
Power factor		0.8
Frequency	Hz	50
Voltage	kV	10,5
Rated Speed	rpm	1500
Permissible Overspeed	rpm	1800
Insulation grade		H
Level of insulation protection		IP23

4.4 GENSET control system

The unit control system is equipped with 3200A circuit breaker, and the ComAp unit controller is used to control the unit's start, stop, grid connection, power, etc. At the same time, it has the functions of controlling container ventilation, lighting, gas leakage protection and stop, and cooling system equipment operation.

4.5 Cooling system (Horizontal type fan cooling)

The unit adopts horizontal fan cooling mode, and the cooling device includes horizontal radiator and a set of cooling equipment. It mainly includes valves, high temperature water pumps, low temperature water pumps, electric three-way ball valves and related instruments, etc. The cooling fan is equipped with an automatic control controller, and the unit automatically opens or closes the number of fans according to the temperature.

4.6 Exhaust system

The exhaust system includes exhaust muffler, exhaust explosion-proof valve, Install it on the top of the container. Muffler is equipped with condensate discharge device.

4.7 Gas transmission system

Gas system includes pressure reducing valves, solenoid shut-off valves, manual shut-off valves, filters and other equipment, which are installed inside into the container. The main valves of the gas transmission system adopt original German DUNGS products or at the same level product. DUNGS has Vibration tested combination controls Multi block and Gas Bloc according US Military Standard MIL-STD-810G/31. Worldwide support via DUNGS branches and subsidiaries in more than 50 countries.

4.7 Heat recovery system

CHG620V12 container gas generator set is equipped with a set of hot water type recovery boilers that utilize the heat of the flared gas to heat softened water provided by the customer. The waste heat boiler is equipped with safety valve, pressure gauge, temperature gauge, etc. For detailed parameters, see the system diagram.



MIF NC 1875 L Natural gas genset 1500 kW Continues Power

MIF PLUS INTERNATIONAL
DANISMANLIK HIZMETLERI A.S.
KAVAKLI MAH. YEŞİLYURT CAD. NO:15/2,
IC KAPI NO: 11, BEYLİKDÜZÜ / ISTANBUL

5. MAIN PARTS MANUAL

No	Item	Qty	Description	Marks
A. MIF NC 1875 L Container gas generator				
1.	MIF NC 1875 L gas generator	1 unit	1500 kW	1500 r/min
1.1	CHG622V16 gas engine	1 unit	HND	
1.2	Alternator	1 unit	Nidec Leroy-Somer	
1.3	Common base	1 unit		
1.4	Engine control system	1 set	HEINZMANN	
2.	Genset control system	1 set	ComAp	
3.	Genset cooling system	1 set		
3.1	Horizontal type radiator	1 set		
3.2	Water pump	2 units		
3.3	Electric three-way valve	1 unit		
3.4	Plate heat exchanger	1 unit		
3.5	Piping and brackets	1 set		
4.	Exhaust System	1 set		
4.1	Muffler	1 unit		
4.2	Exhaust explosion-proof valve	1 unit		
5.	Unit gas branch pipeline equipment	1 set	German DUNGS	
5.1	Filter	1 unit	DN100-PN16	
5.2	Shut-off solenoid valve	1 unit	DN100-PN16	
5.3	Branch pipes device	1 unit	DN100-PN16	
5.4	Piping and brackets	1 set		
6.	Hot water type waste heat boiler	1 set		
7.	Container	1 set	40 ft base	
7.1	Ventilation system	1 set		
7.2	Lighting system	1 set		
7.3	Gas leak alarm system	1 set		
7.4	Noise reduction system	1 set		
8.	Oxygen senser and cable	1 set		
9.	Electric Water Preheater	1 set	Electric Heater	Option
10.	Battery charger	1 set	BP2024	Option
11.	Spring shock absorber	1 set		Option
12.	High temperature butterfly valve	3 unit		

MIF PLUS INTERNATIONAL
DANISMANLIK HIZMETLERI A.S.
KAVAKLI MAH. YEŞİLYURT CAD. NO:15/2,
IC KAPI NO: 11, BEYLİKDÜZÜ / ISTANBUL
Web: www.mif-energy.com
E-mail: anton.t@mif-plus.com
Phone/WhatsApp: +90 534 553 50 45